

Datasheet

AS9080CS-11

For the AS9080CS speaker, the composite enclosure creates electrical isolation from the vehicle chassis to extend product life. The speaker was designed for passive drainage of water and moisture. This speaker is used especially in vehicles equipped with a special warning light and sound device.



SPECIFICATION

Impedance: 11 Ohm


Output: 100 W

Frequency range: 200 - 5000 Hz

Output sound pressure: ≥ 129 dB

CONNECTING

When connecting two or more loudspeakers, it is necessary to observe the polarity of the winding of the diaphragm oscillating coil as shown in the picture. White wire: PLUS, Black wire: MINUS

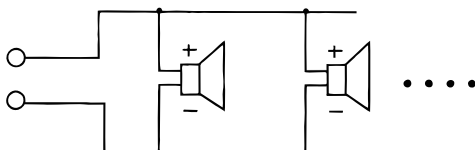

DIMENSIONS

height: 171 mm
width: 172 mm
depth: 78 mm
weight: 2,4 kg

