

## Datasheet

## AS6100

For the AS6100 speaker, the composite enclosure provides electrical isolation from the vehicle chassis to extend product life. The speaker was designed for passive drainage of water and moisture. This speaker is used especially in vehicles equipped with a special warning light and sound device.



### SPECIFICATION

**Impedance:** 11 Ohm


**Output:** 100 W

**Frequency range:** 500 - 4000 Hz

**Output sound pressure:**  $\geq 129$  dB

### CONNECTION

When connecting two or more loudspeakers, it is necessary to observe the polarity of the winding of the diaphragm oscillating coil as shown in the picture. Brown wire: PLUS, Blue wire: MINUS

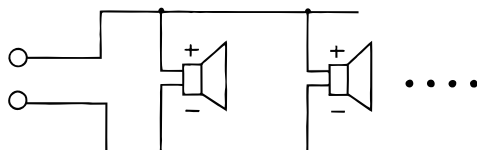

### DIMENSIONS

height: 164 mm  
width: 165 mm  
depth: 84 mm  
weight: 3 kg

