

Datasheet

AS100LF-11

Low-frequency speaker for vehicles with right-of-way. Pressure vibration waves provide more penetrating warning tones to ensure the right of way due to the physical properties of low frequencies that travel more easily through space. An ideal solution for high traffic areas and busy intersections.

SPECIFICATION

Impedance: 11 Ohm


Output: 100 W

Frequency range: 125 Hz - 1 kHz

Connecting wires: 1,5 mm² / 70 cm with loose ends






CONNECTION

When connecting two or more loudspeakers, it is necessary to observe the polarity of the winding of the diaphragm oscillating coil as shown in the picture.
Red wire: PLUS, Black wire: MINUS

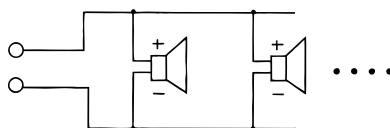

DIMENSIONS

diameter: 210 mm
height: 223 mm
weight: 2,5 kg

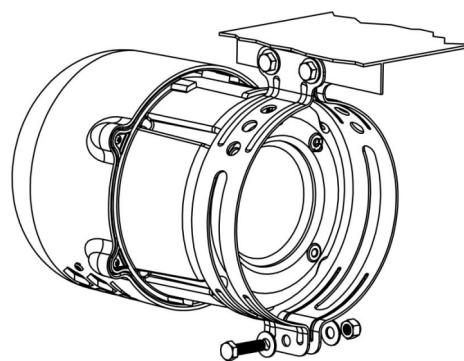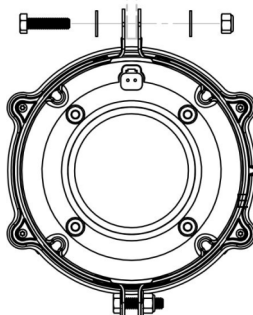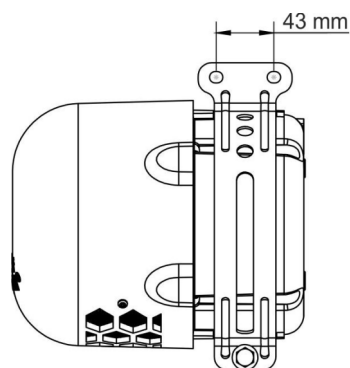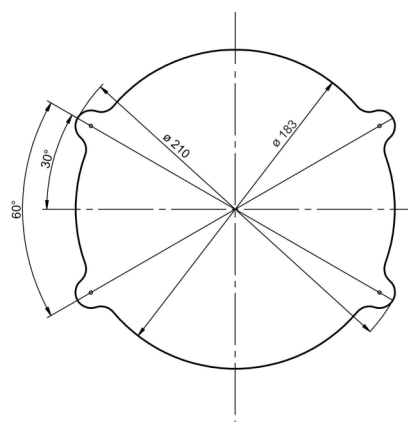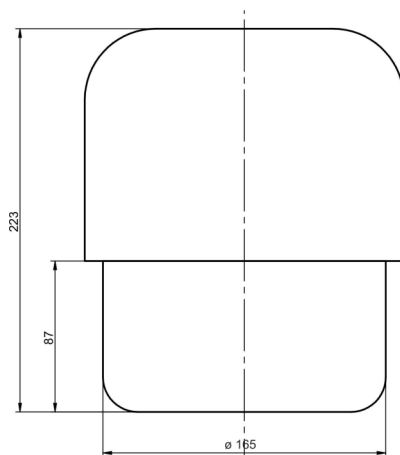

HOLOMÝ s.r.o.

Hemy 829, Krásno nad Bečvou
75701 Valašské Meziříčí
Česká republika

tel: +420 571 685 970
+420 571 685 971
fax: +420 571 685 979

e-mail: sales@holomy.cz
www.holomy.cz

Certifikát
ČSN EN ISO 9001:2016